




## GF843VTC SURFACE IRRADIATION UNIT

This unit is designed to provide surface and upper air disinfection. The dosage provided will vary depending on the distance from the lamp to the target area. It is constructed from 304 stainless steel and is fitted with a reflector to maximize lamp output. It is not suitable for coolroom use (refer GF24CRM).

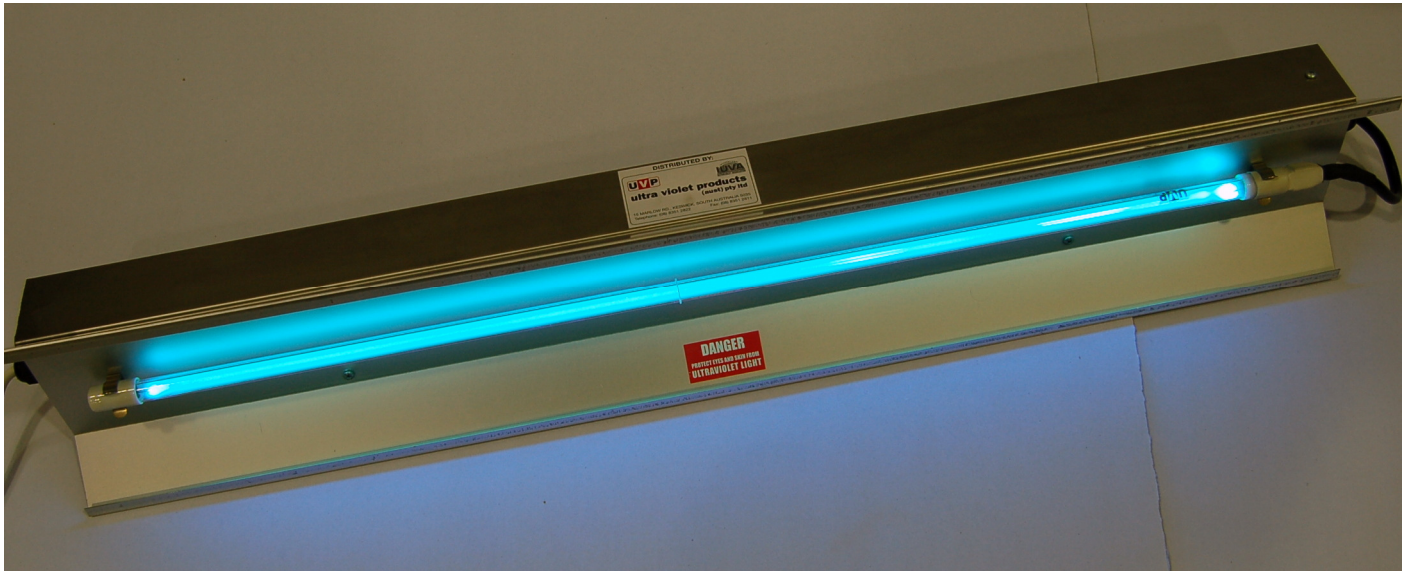

U.V.C. output	-	minimum 120mJ/cm <sup>2</sup> at 1 metre
Power requirements	-	240 volt 50Hz, 10 amp G.P.O.
Power consumption	-	44 watt
Lamp life	-	8500 hours continuous operation 4000 hours intermittent operation
Dimensions	-	930mm L 100mm W (180mm inc. reflector) 65mm H (110mm inc. reflector)
Weight	-	2.5kg